

## MODEL : GSB-10

### HYBRID POWER STATION



#### Design Standards

GSB® is a new range of secure integrated hybrid power station. With diesel generator, solar power, battery storage and hybrid solar Inverter in one secure unit.

GSB® is mainly developed for residents Power, Reduce the dependence on Main Power and decrease the consumption cost.

#### Benefits

- Integrated installation, convenient storage and transportation;
- High return on investment and quick return;
- Simple operation and easy maintenance;
- Power and Capacity can be expanded, meet different user needs;
- Accept customer customization, suitable for various scenarios;

#### Warranty

Battery Performance: 2000 cycles(80% DOD) or 2 years after manufacture;  
Generator: 18 months after manufacture or 1500 hours running time;



#### General Specification

Model	GSB-10
System Rated Output Power	10 kVA
Rated Output Voltage	400V/230V@50Hz/60Hz,3ph. (According to customer requirements)
Min.Battery Storage Capacity	10 kWh
Max.Battery Storage Capacity	25 kWh
Output Terminals	Copper terminals & CEE 16A/5P Socket
Expand Dimension(W*D*H)	2950*5400*3350mm
Loading Dimension(W*D*H)	2950*1150*2200mm
Net.Weight	2800kg
Loading Capacity of 40'HC	8 units
Discharge Temperature Range	-20°C~50°C




## SOLAR PANEL

MAX. POWER:

**2750<sub>W</sub>**

With HIGH EFFICIENCY

UP TO **21%~!!**



## GENERATOR

RATED POWER: 7kW

With LOW CONSUMPTION

DOWN TO **2.6 L/H~!!**



## INTELLIGENT INVERTER

ONE PIECE FOR  
**SOLAR & BATTERY**  
& **GRID**  
& **GENERATOR**

Fits the practical application & guaranteed by high-quality manufacturing technology



### Generator Set

Prime Power	10 kVA
Fuel Consumption	2.6 L/h@100% load
Fuel Type	Diesel(Nature Gas Engine for option)
Fuel Tank Capacity	36 hours
Base Functions	Automatic Start-up / Alarm / Automatic Stop / Emergency Stop

### Solar Panel

Maximum Power	550W
Power Tolerance	0~+5W
Max-Power Voltage (Vm)	41.96VDC
Max-Power Current (Im)	13.11A
Qty.	5pcs

### Energy storage battery

Cell Type	LFP(LiFePO4)
Pack Model	MF51100D
Pack Capacity	5 kWh
Pack Rated Voltage	51.2 VDC
Discharge Depth	90%
Charger/Discharge Current	97.7 A(1.0C)
Battery Rack Voltage	43.2V~59V
Rated Cycle Life	≥2000 (80% DOD)


### Hybrid Inverter System

Solar Controller	MPPT*2
AC Voltage Range	380~415Vac
Max.PV Current	26A*2
Max.Charge/Discharge Current	210A
Max.Conversion Efficiency	97.6%
Rated Output Power	10kVA(0.8leading~0.8lagging)

## Options

Engine	Alternator	Fuel System	Hybrid Power Station
Water Jacket Preheater Oil Preheater Oil manual pump	PMG excitation Space heater Winding temperature measuring	12 / 24 hour base tank Bunded fuel tank External fuel tank Automatic fuel feeding Switch between external tank and base tank (three-way valve)	Deepsea, ComAp, Smartgen etc. controller Trailer Tools with the machine

## Basic Logic

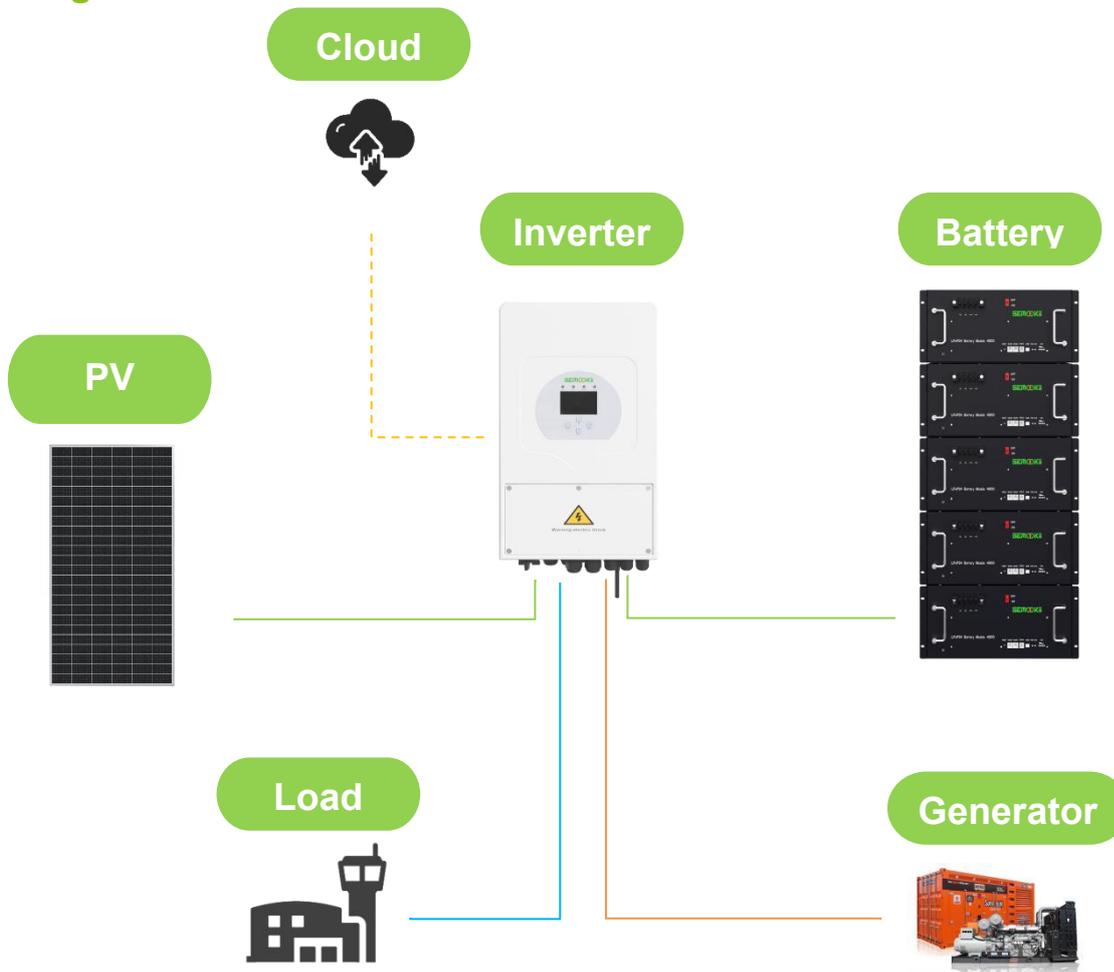

Power Priority	Highest	Secondary	Back Up
Functions	PV Take load/charge	Battery Take load	Generator Take load/charge



**MPMC POWERTECH CORP.**  
sales@mpmc-china.com | www.mpmc-china.com

Photographs are for illustrative purposes only and may not reflect final specification.

Follow us

- <https://www.facebook.com/mpmcgroup>
- <https://www.linkedin.com/company/mpmcpowertech/>
- <https://www.youtube.com/user/MPMCGenerator>

All information in this document is substantially correct at time of printing and may be altered subsequently. Final weight and dimensions will depend on completed specification.